

LIGHTWEIGHT, HEAVY-DUTY PERFORMANCE.

Help increase fuel efficiency and carrying capacity with the industry's premier lightweight brake drum: CentriFuse® Lite. Featuring the robust performance of original CentriFuse, CentriFuse Lite can reduce tractor/trailer total weight by up to 232 pounds without sacrificing durability or stopping power.

Lightweight

Just 83 pounds! Ideal for weight-sensitive applications, such as refrigerated fleets, tanker fleets and bulk haulers.

Proven

Based on the original CentriFuse design, with over 80 years of history and performance.

Performance

Permanently bonded steel shell provides proven resistance to heat cracks.

Durable

Proprietary alloy braking surface reduces fade and wear with superior heat absorption.

Precision Balanced

Mass centering process improves balance for a smoother ride. Balance weights eliminate the need to machine away critical material from steel shell like competitors.

Guaranteed

Backed with industry-leading, 10-year written limited warranty* for confidence and peace of mind.

*Contact your local Motor Wheel representative for complete warranty terms, conditions and limitations.



For more information on
CentriFuse drums, call 855.743.3733
or visit www.motorwheel-intl.com

THE INDUSTRY'S PREMIER LIGHTWEIGHT BRAKE DRUM

With a 20,000-pound axle load rating, CentriFuse® Lite drums can handle the demands of many types of commercial trucking applications while reducing the weight of the vehicle, helping provide greater stopping power, better fuel economy and increased payload capacity.

APPLICATIONS


CentriFuse Lite is ideal for weight-sensitive applications, such as:

- Refrigerated Fleets
- Tanker Fleets
- Bulk Haulers

WEIGHT SAVINGS

Save up to 232 pounds using CentriFuse Lite. Increase miles per gallon and/or revenue-producing payload.

Steel Shell for Enhanced Performance

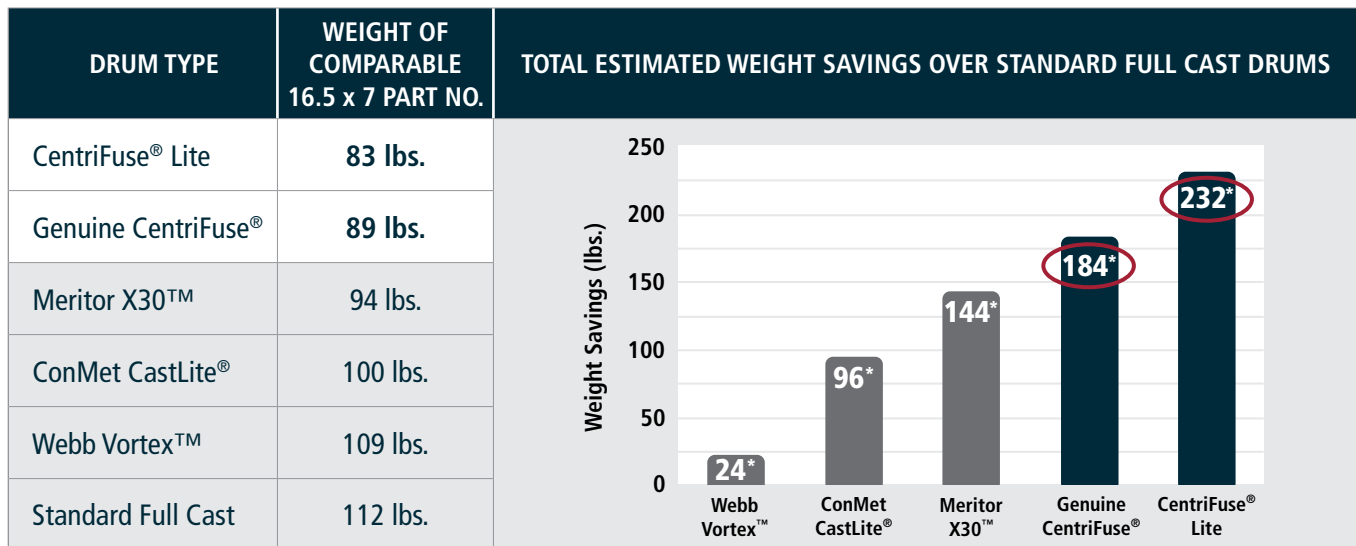

*Total estimated weight savings for a typical Tractor and Trailer equipped with 4 axles and 8 drums.

Above data is based upon internal testing and/or published specifications.

Actual product performance may vary depending upon vehicle configuration, operation, service and other factors. All applications must comply with applicable specifications from Motor Wheel and the respective vehicle manufacturer. Contact Motor Wheel for additional details regarding specifications, applications, capacities, and operation, service and maintenance instructions.

Contact Motor Wheel at **855.743.3733** for additional information.



MOTOR WHEEL
2660 Sydney St.
Chattanooga, TN 37408 USA
855.743.3733

www.motorwheel-intl.com

MW001 10-20 Motor Wheel is a brand of Hendrickson

© 2020 Motor Wheel, LLC. All Rights Reserved. All trademarks shown are owned by Motor Wheel, LLC, or one of its affiliates, in one or more countries, except for Meritor, X30, Webb, Vortex, ConMet and CastLite which are the property of their respective owners. Information contained in this literature was accurate at the time of publication. Product changes may have been made after the copyright date that are not reflected.

Printed in United States of America